

SERIES AZ 30, 35 & 36

1/4 INCH DIAPHRAGM VALVE

Springless – manual and pneumatic (NC & NO)



- Replaceable seat
- 316L SS construction
- Operating pressures from 125 psig (9 bar) to 3,000 psig (207 bar)
- 10 μ in. (0.25 μ m) Ra avg. standard surface finish
- LOTO options
- Flow capacity 0.23 to 0.29 C_v
- Manual valves 1/4 turn to multi-turn
- Forged body construction for integral fittings and tube stub (P porting)
- Bar stock body for welded fitting and multi-port options (PW porting)
- Multi-port options available (refer to page 4)
- Installation and operating instructions available at www.aptech-online.com in the Tech Briefs section

Manual valves

	PSIG / BAR	
	250 / 17	3,000 / 207
AZ 3600		●
– Round knob, multi-turn		
AZ 3625		●
– Lever valve, 1/4 turn		
– LOTO, PL 225 optional		
– Lever position indicates valve status		
AZ 3650		●
– Round knob, 1/4 turn		
– Open/closed status indication window		
AZ 3652	●	
– Round knob, 1/4 turn		
– Open/closed status indication window		
– Unique design combines scalloped round knob with raised rectangular section		
AZ 3657		●
– Round knob, 1/4 turn		
– Pull, then turn to open – operational safety feature		
– Open/closed status indication window		
– LOTO – integral standard feature		

Pneumatic valves, normally closed (NC)

	125 / 9	250 / 17	3,000 / 207
AZ 3540	●		
AZ 3542	●		
AZ 3550		●	
AZ 3000 and 3002			●

Pneumatic valve, normally open (NO)

	250 / 17
AZ 3580	●

All specifications subject to change without notice.

HIGH PURITY ~ HIGH VALUE

Engineering Data — Manual valves

Operating pressure	AZ 3652 AZ 3600, 3625, 3650, 3657	Vacuum to 250 psig (17 bar) Vacuum to 3,000 psig (207 bar)
Flow coefficient (C_v)	AZ 3600, 3625, 3650, 3652 AZ 3657	0.29 ($X_T = 0.6$)

Engineering Data — Pneumatic valves

Operating pressure	AZ 3540, 3542 AZ 3550, 3580 AZ 3000, 3002	Vacuum to 125 psig (9 bar) Vacuum to 250 psig (17 bar) Vacuum to 3,000 psig (207 bar)
Flow coefficient (C_v)	AZ 3000 AZ 3002 AZ 3540, 3542, 3550, 3580	0.23 ($X_T = 0.5$) 0.28 ($X_T = 0.5$) 0.29 ($X_T = 0.6$)
Status	AZ 3000, 3002, 3540, 3542 AZ 3550 AZ 3580	Normally closed (NC) Normally closed (NC) Normally open (NO)
Actuation pressure	AZ 3000, 3002, 3540, 3550 AZ 3580 AZ 3542	70 to 110 psig (5 to 8 bar) 70 to 110 psig (5 to 8 bar) 60 to 110 psig (4 to 8 bar)
Actuation port	AZ 3000, 3002, 3540, 3580 AZ 3542 AZ 3550	1/8 NPT, top port M5 top port 10–32 inch, side port

Engineering Data — Other parameters all valves

Inlet and outlet connectors	1/4 and 3/8 inch face seal or tube weld
Internal volume	0.06 in ³ (1.07 cm ³)
Operating temperature	-40° to +160° F (-40° to 71° C)
Surface finish	10 μ in Ra
Proof pressure	1.5 times operating pressure
Burst pressure	3 times operating pressure
Inboard leakage	2 x 10 ⁻¹⁰ sccs
Outboard leakage	2 x 10 ⁻⁹ sccs He
Leakage across seat	4 x 10 ⁻⁸ sccs He

Engineering Data — Wetted materials all valves







Body	SS 316L*
Finish	Electropolished and passivated
Diaphragm	Elgiloy®
Seat	PCTFE (Vespe® optional)

*Sulfur content varies from forged to bar stock body.
Refer to product note PN414 for use of single melt SS.

Vespe® DuPont

Elgiloy® Elgiloy Corporation

All specifications subject to change without notice.

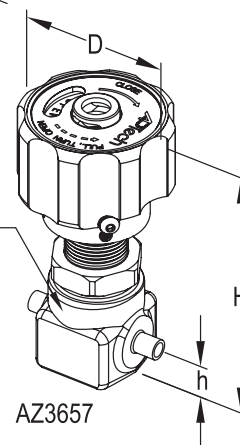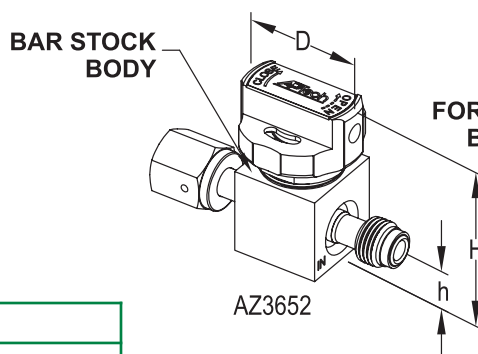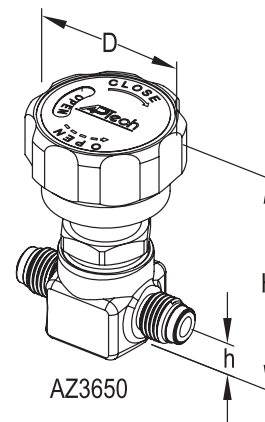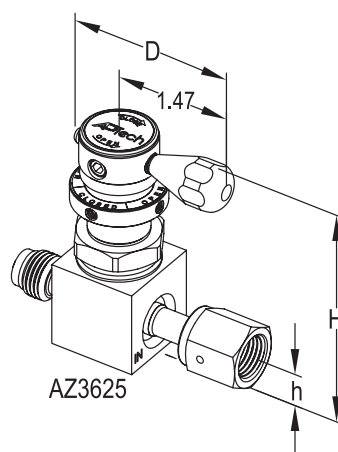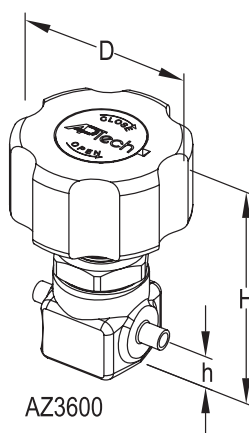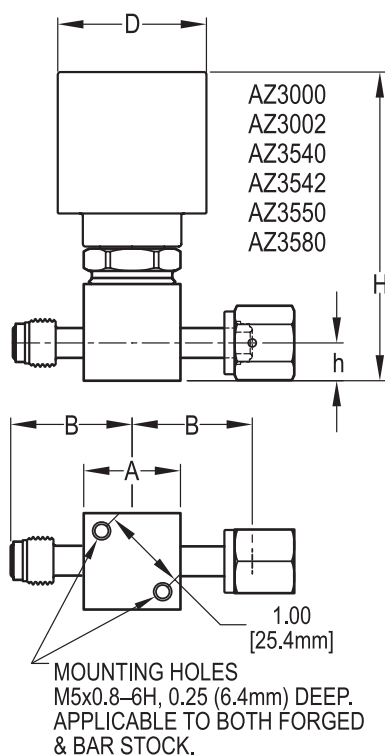


VALVE	D		H	
	inch	mm	inch	mm
AZ3000	ø1.98	50.3	4.10	104
AZ3002	ø1.98	50.3	4.10	104
AZ3540	ø1.46	37.1	3.49	89
AZ3542	ø1.57	40.0	2.24	57
AZ3550	ø1.37	34.8	3.28	83
AZ3580	ø1.46	37.1	3.17	81
AZ3600	ø2.12	53.8	3.00	76
AZ3625	2.04	51.8	2.94	75
AZ3650	ø1.87	47.5	3.02	77
AZ3652	ø1.50	38.0	2.17	55
AZ3657	ø1.87	47.5	3.60	91

- Forged body only available in 2P porting with same type fittings in inlet and outlet.
- Bar stock body, PW porting, has welded fittings in any combination of available type and size.
- P porting denotes forged body or bar stock body with integrally machined fittings. PW porting denotes welded fittings.
- Height of the valve (H) is an approximate value.

BODY TYPE	PORTNG	CONNECTION	A		B		h	
			inch	mm	inch	mm	inch	mm
FORGED	P	MV4xMV4 (Fixed)	N/A	N/A	1.140	29.0	0.44	11.2
	P	TW4xTW4	N/A	N/A	0.875	22.2	0.44	11.2
BAR STOCK	PW	TW4	1.12 SQ	28.4	1.060	26.9	0.44	11.2
	PW	FV4, MV4 (Fixed)	1.12 SQ	28.4	1.390	35.3	0.44	11.2
	PW	FV6, MV6	1.12 SQ	28.4	1.930	49.0	0.44	11.2
	PW	TW6	1.12 SQ	28.4	1.325	33.7	0.44	11.2

All dimensions in inches (mm). Metric dimensions are for reference only.
All specifications subject to change without notice.

ORDERING INFORMATION

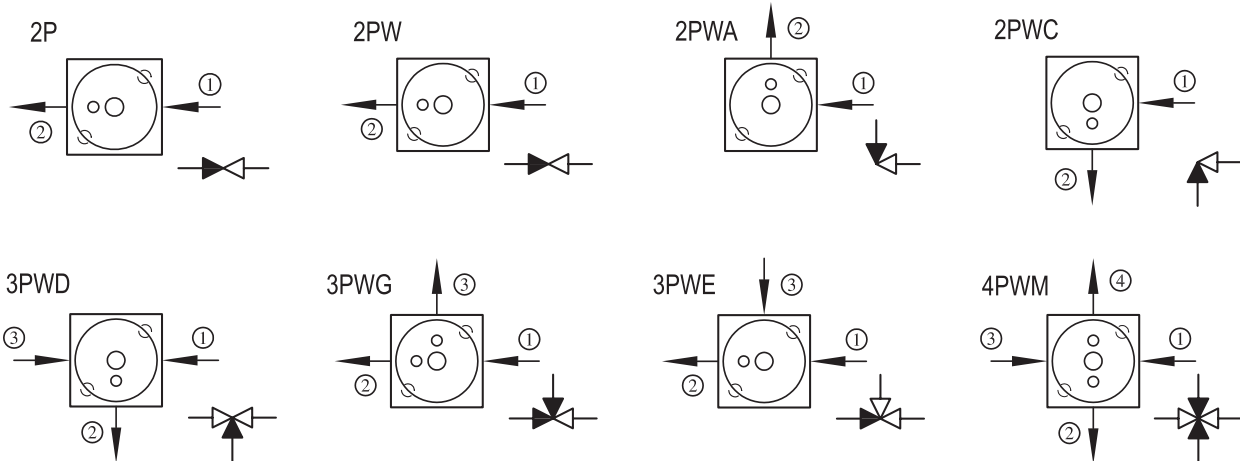

- CAUTION:** Product selection is the sole responsibility of the user, regardless of any recommendations or suggestions made by the factory. The user shall make selections based upon their own analysis and testing with regard to function, material compatibility and product ratings. Proper installation, operation and maintenance are also required to assure safe, trouble free performance.

HMI12157/February2012