

Mott High Purity Gas Filter

GasShield® Point-of-Use Series

POU-3-H

Hastelloy® C-22 Filter Media and Housing



Description

For maximum gas filtration efficiency, strength and reliability, GasShield POU all-metal gas filters are ideal for Ultra High Purity (UHP) gas delivery applications. They are compatible with most high purity electronics grade process gases. For more point-of-use filter offerings, check out the Mott line of Penta® nickel media or Defender fiber metal filters.

Applications

UHP corrosive gas filtration for: gas sticks for equipment hookup, valve manifold boxes, gas cabinets, tool isolation gas boxes, on-board OEM tool gas boxes.

Warranty:

Mott Corporation ("Mott") warrants its GasShield filter will meet the specified retention and media integrity standards for a period of five years from the date of purchase, providing the filter is properly installed and used in accordance with the specified flow, pressure, temperature, and chemical compatibility as published by Mott. Mott will replace or grant a purchase price refund for any GasShield filter which proves defective under the terms of this limited warranty. No other remedies apply. Mott disclaims all other warranties, either expressed or implied, including any warranty of merchantability or fitness for a particular purpose. Mott shall have no liability for consequential incidental, special or punitive damages, lost profits or savings, or damages from lost production or damage to other materials

Materials of Construction

Hardware:	Hastelloy C-22
Filter Medium:	Hastelloy C-22
Wetted Hardware Surface Finish:	5 Ra, Electro-polished


Performance Specifications

Rated Flow:	45 slpm
Particle Removal Size:	0.003 µm
Filter Efficiency (Log Reduction Value):	9 LRV (99.9999999% reduction in particles). Confirmed at the most penetrating particle size of 0.08 µm per SEMI F38-0699 test method
Helium Leak Rating:	1 x 10 ⁻⁹ atm cc/sec
Moisture Contribution:	<10 ppb after 1 hour at low-flow ambient purge per SEMI F27 test method
Total Hydrocarbons:	Below detectable limits per SEMASPEC 90120396B test method
Particle Shedding:	Zero particle contribution above background (<1 particle/ft ³) per SEMI F43-0308 test method

Operating Conditions

Maximum Operating Pressure:	3750 psig (258.5 barg)
Maximum Operating Temperature for Inert Gas:	450°C
Maximum Differential Pressure:	1000 psid (68.9 bar)


Mott High Purity Gas Filter | GasShield® Point-of-Use Series | POU-3-H
Hastelloy® C-22 Filter Media and Housing

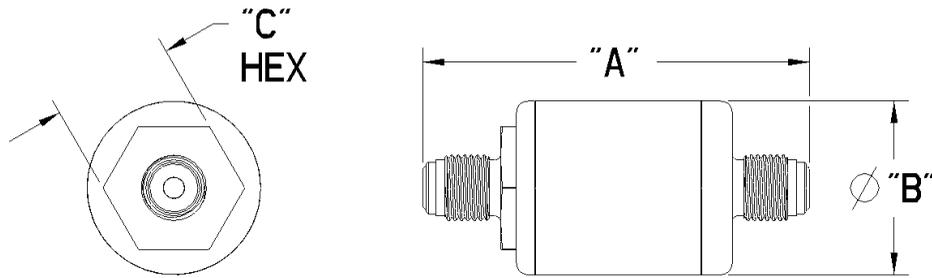

Ordering Information:

Part Description	Part Number	Fitting Type	A Inches/ mm	B Inches/ mm	C Inches/ mm
POU-3-HV1	6800002	1/4 inch Male/Male Face Seal	3.31/84.0	1.50/38.1	1.062/26.9
POU-3-HV3	6800148	1/2 inch Male/Male Face Seal	3.31/84.0	1.50/38.1	1.062/26.9

Mott POU-3-H Flow Rate vs. Differential Pressure
Typical Flow Curves as a Function of System Pressures

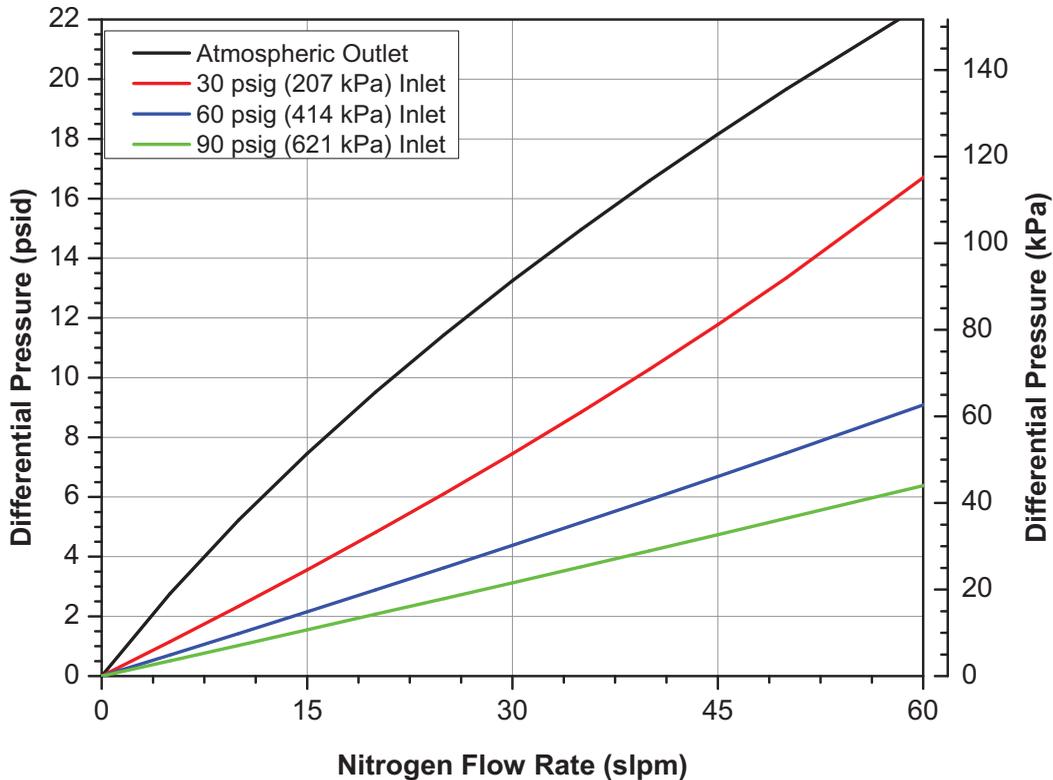

Hastelloy is a registered trademark of Haynes International, Inc.



84 Spring Lane, Farmington, CT 06032-3159
860-747-6333 | Fax 860-747-6739 | www.mottcorp.com | Quest@mottcorp.com

Note: Specifications are subject to change without notice. Contact Mott authorized sales representative for most recent specifications.